

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.



REPLACEMENT
ELEMENT

System tested and certified by NSF International against NSF/ANSI Standard 42, 53, 401 and P473 for the reduction of the claims specified on the Performance Data Sheet and at www.nsf.org.



C USA

Tested and certified by WQA against NSF/ANSI 42 and 53 for the reduction specified on the Performance Data sheet.

- **Conforms to NSF/ANSI Standard 53 for VOC reduction. See performance data sheet for individual contaminants and reduction performance.**
- **Systems certified of cyst reduction may be used on disinfected waters that may contain filterable cysts.**
- **Rated capacity: 1,700 Liters**
- **Flow Rate: 0.5 GPM**

Manufacturer: Aquasana, Inc.

6310 Midway Road, Haltom City, Texas 76117, USA

Sole Distributor in China: Computime China Distribution (Hong Kong) Limited

China Distribution Centre: Computime Trading (Shenzhen) Co., Ltd

Room 501-G, 5th Floor, Block B, Jiuzhou Electric Building, Number 7 Science and Technology South 12th Road, Nanshan District, Shenzhen, Guangdong, China

Customer Service Hotline: 400 008 2132 Email: CS-CBD@computime.com




Model AQ-4035

Replacement Cartridge Instructions

for use with AQ-4000

- 1. Remove the hoses by pressing and holding down the gray collet ring while pulling the hose out. Place unit in sink to catch spills. Remove the threaded filter caps by turning the white A knob to the right and the blue B knob to the left.**
- 2. Remove old filter cartridges and dispose of them in the trash. Reuse existing large O-rings as they have a 10-year lifecycle.**

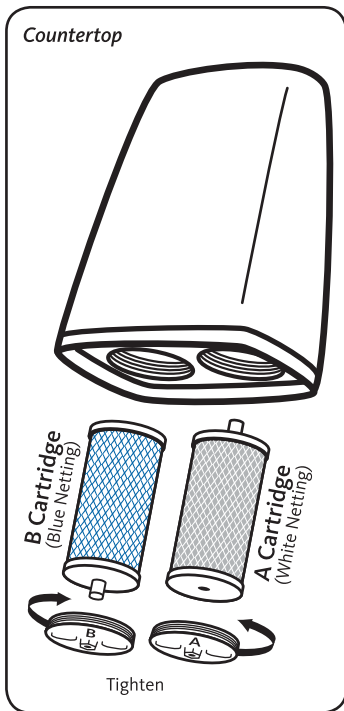

↓ proceed to step 3

- 3. Install the new filter cartridges.**
 - Insert the "A" cartridge with the nipple-end first. Then, press and rotate to seat properly.
 - Install the "B" cartridge by inserting the nipple into the "B" cap
- 4. Tighten the threaded filter caps firmly in the opposite direction of the arrows shown on the caps.**
 - The "A" cap will tighten by turning it to the left
 - The "B" cap will tighten by turning it to the right
 - Ensure O-ring is in place
- 5. Turn on the cold water and check for leaks with the filter still lying flat.**
 - If leaks are noticed, repeat step 3 and 4
 - If no leaks are noticed, return the filter to the upright position and allow the water to run for 10 minutes until all cloudiness and discoloration have disappeared
- 6. Enjoy the benefits of drinking clean, healthy water!**

